



THE U.S. ARMY PATHFINDER SCHOOL NOMENCLATURE





AERIAL DELIVERY SLING TYPE XXVI

MULTI-LOOP LINE



MAX. RATED CAPACITY

#LOOPS	PENDANT	LIFTING PROVISION
2	8,900 LB	5,600 LB
3	13,500 LB	8,500 LB
4	17,800 LB	11,200 LB
6	27,000 LB	17,000 LB

LENGTHS

#	OF LOOPS LENGTHS AVAILABLE
2	3'-9'-11'-12'-16'-20'-120'
3	60'-140'
4	3'-9'-11'-12'-16'-20'-28'
6	60'-120'



TWO LOOP, THREE FOOT APEX RING (DONUT RING)



1. TYPE XXVI MULTI-LOOP LINE/3FOOT APEX RING (DONUT RING)/ RATED CAPACITY = 10,000LBS
2. TYPE IV CONNECTOR LINK/ RATED CAPACITY = 12,500 LBS
3. BASE PLATE
4. ALUMINUM BUFFERS X 2
5. LOCKING PLATE
6. COTTON BUFFER



TWO POINT LINK ASSEMBLY



1



1. TWO POINT LINK ASSEMBLY/ RATED CAPACITY = 25,000 LBS




SUSPENSION CLEVISES



1. SMALL SUSPENSION CLEVIS/ RATED CAPACITY=6,250 LBS, LIFTING PROVISION=3,750 LBS
2. MEDIUM SUSPENSION CLEVIS/ RATED CAPACITY=6,250 LBS, LIFTING PROVISION=3,750 LBS
3. LARGE SUSPENSION CLEVIS/ RATED CAPACITY=12,500 LBS, LIFTING PROVISION=7,875 LBS
4. NUT
5. BOLT




CARGO TIE-DOWN EQUIPMENT

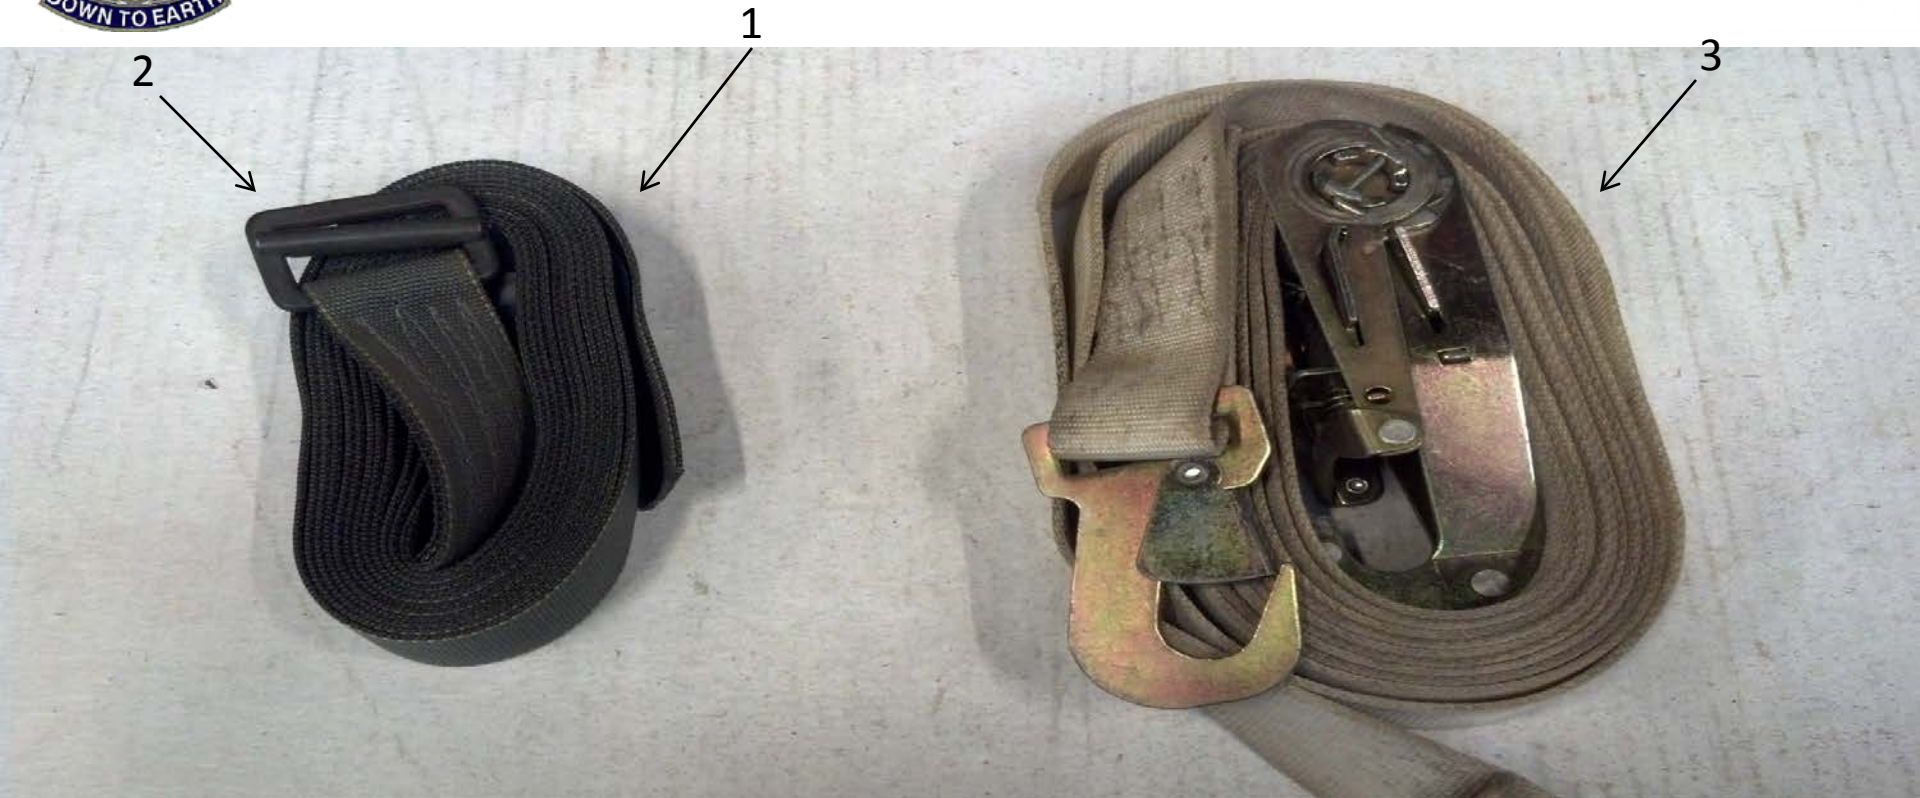

1. A7A STRAP RATED CAPACITY = 500LBS
2. FRICTION ADAPTER
3. CGU-1B (CARGO TIE-DOWN DEVICE) RATED CAPACITY = 5,000LBS




CARGO TIE-DOWN EQUIPMENT CONT.

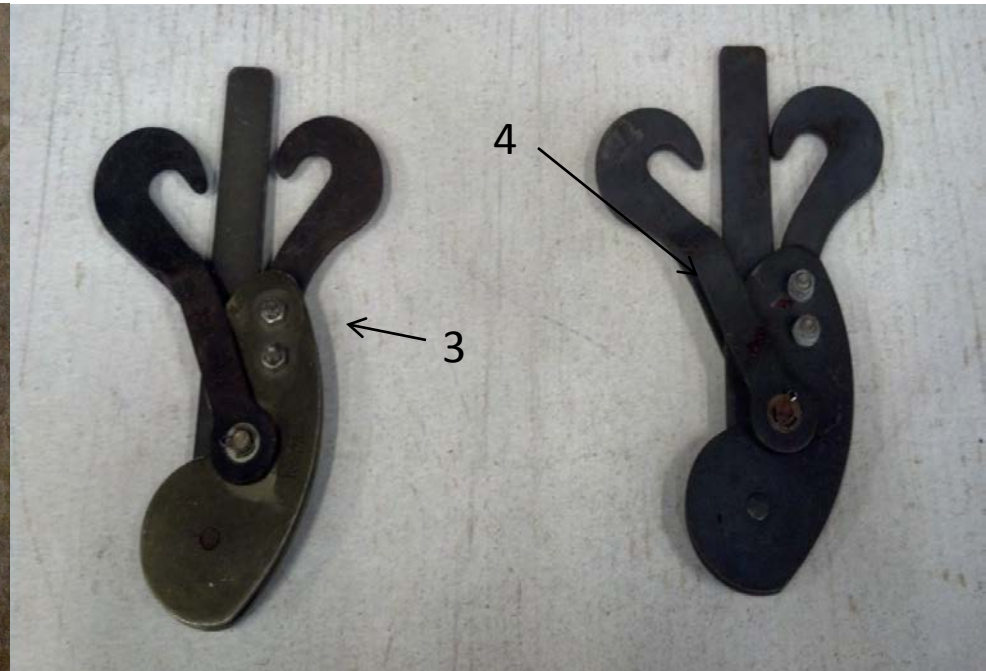

1. 15 FOOT TIE-DOWN STRAP/ RATED CAPACITY = 10,000LBS
2. D-RING
3. SILVER LOAD BINDER/ RATED CAPACITY = 5,000LBS
4. BLACK LOAD BINDER/ RATED CAPACITY = 10,000LBS




10,000LBS SLING LEG

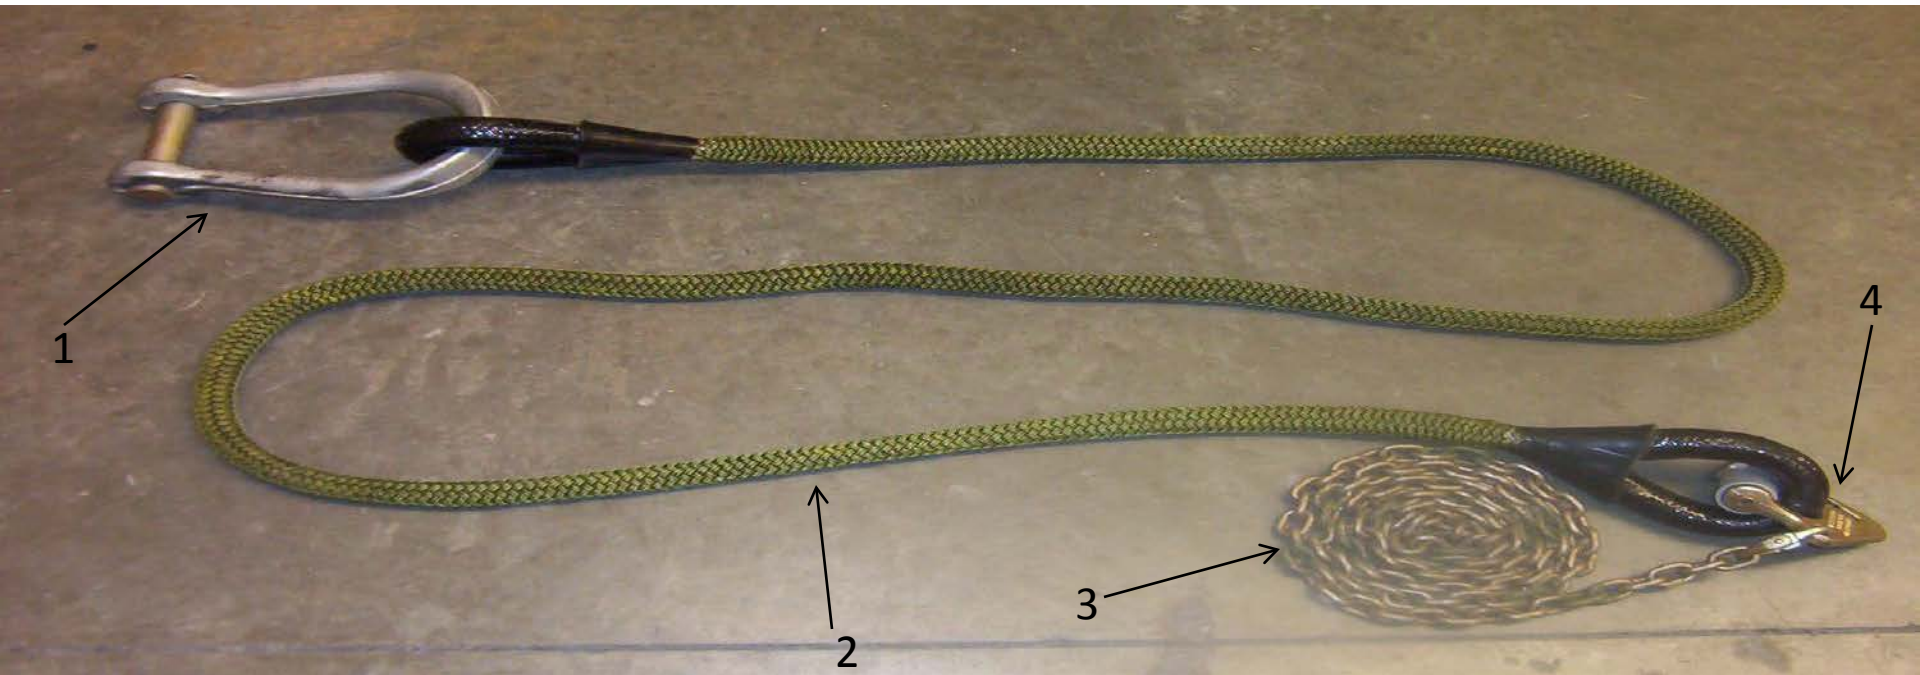

1. 10,000 LBS APEX FITTING/ RATED CAPACITY = 10,000LBS
2. 10,000 LBS SLING LEG/ RATED CAPACITY = 2,500 LBS
3. CHAIN
4. GRABHOOK ASSEMBLY




25,000 LBS SLING LEG

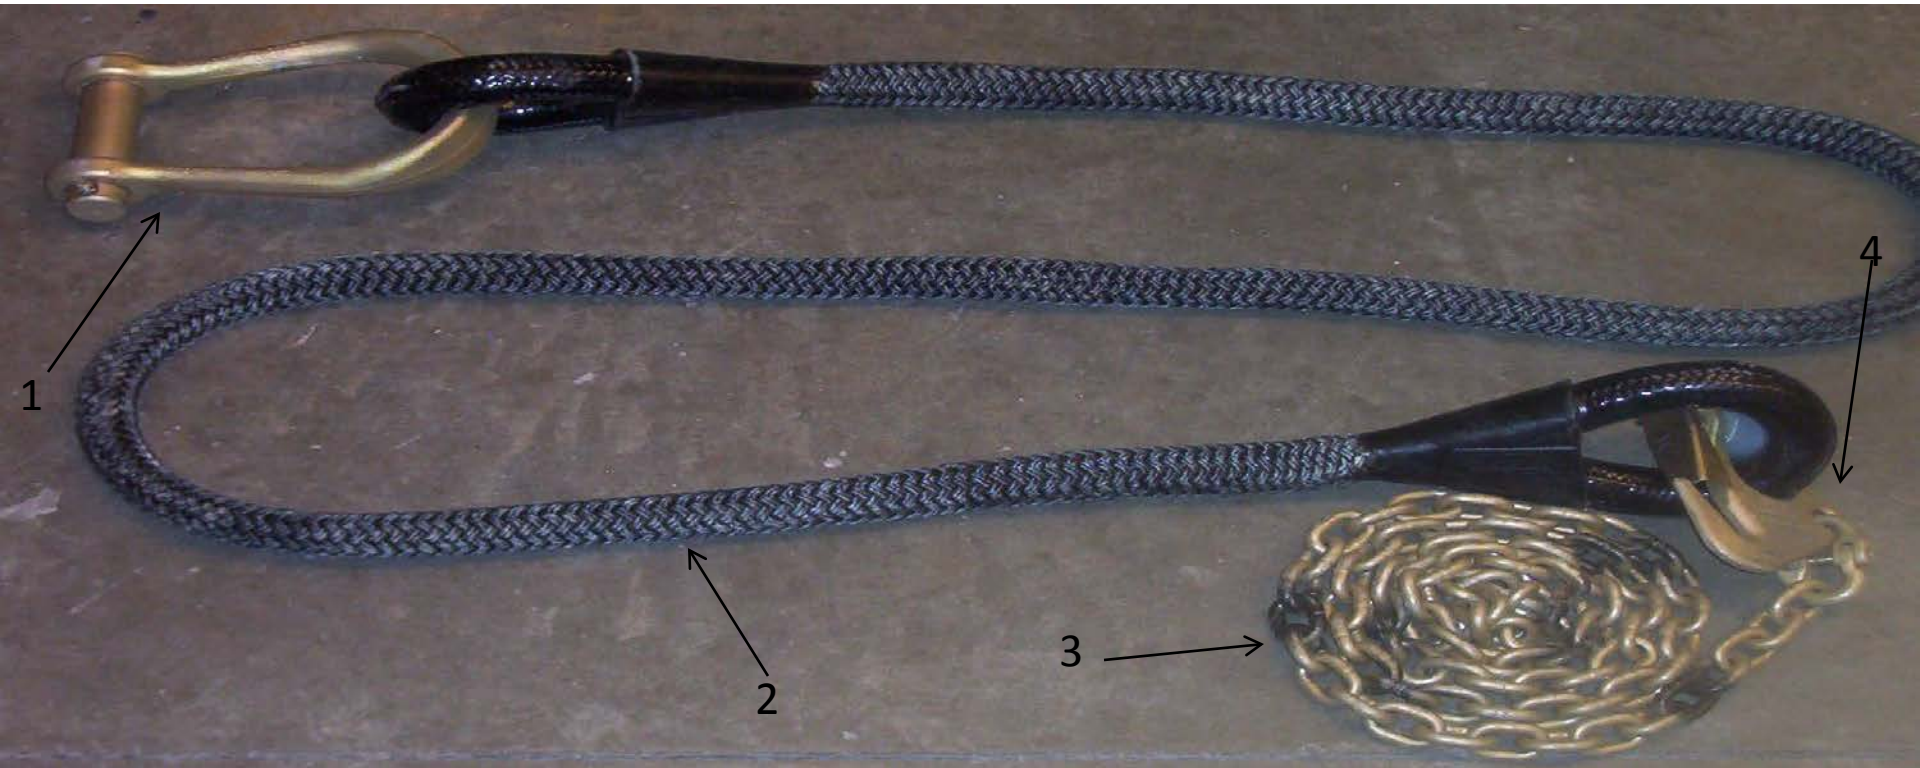

1. 25,000 LBS APEX FITTING/ RATED CAPACITY = 25,000 LBS
2. 25,000 LBS SLING LEG/ RATED CAPACITY = 6,250 LBS
3. CHAIN
4. GRABHOOK ASSEMBLY




APEX FITTING

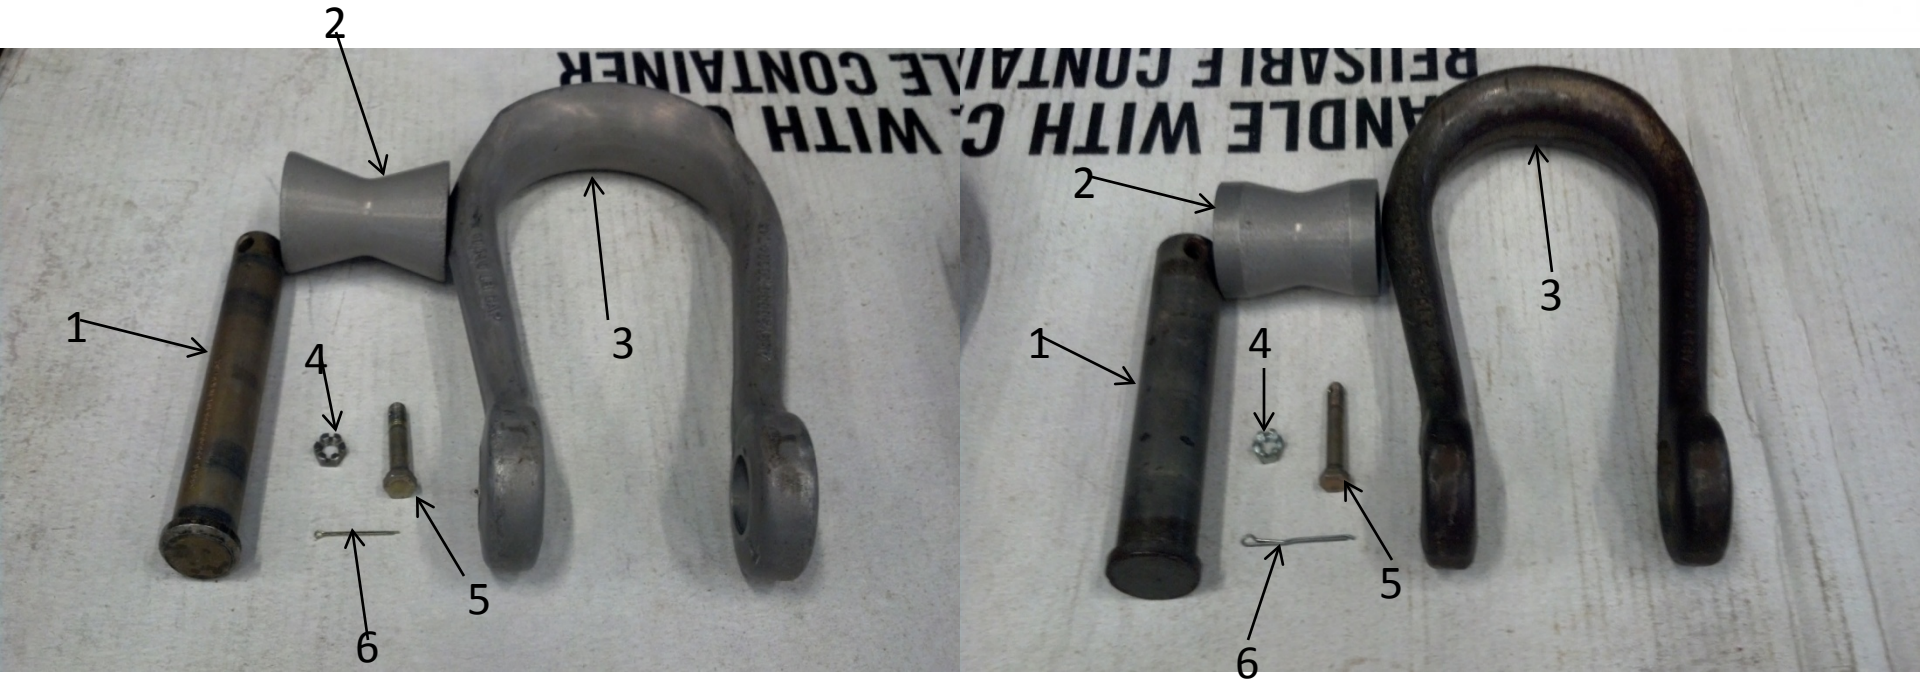

1. APEX FITTING PIN/ 10,000LBS=1 1/8IN, 25,000 LBS=1 1/2IN DIAMETER
2. APEX SPACER
3. APEX SHACKLE/ 10,000LBS AND 25,000LBS
4. CASTELLATED NUT
5. 3/8 INCH DRILLED BOLT
6. COTTER PIN



GRABHOOK ASSEMBLY

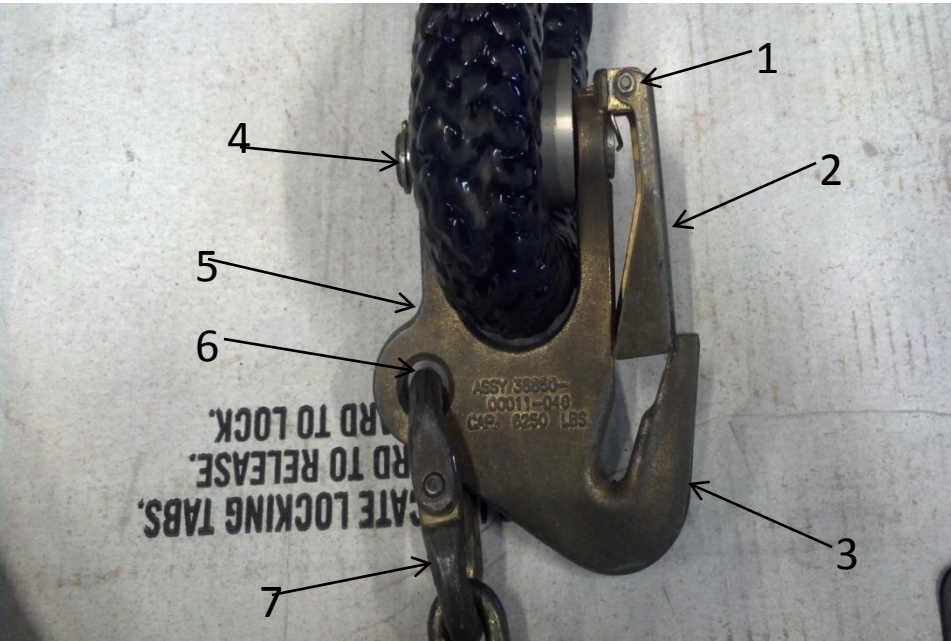


1. BOLT AND LOCKNUT
2. KEEPER
3. HOOK
4. PIN
5. YOKE

6. EYE
7. COUPLING LINK
8. SPACER
9. SNAP RING




5K CARGO NET

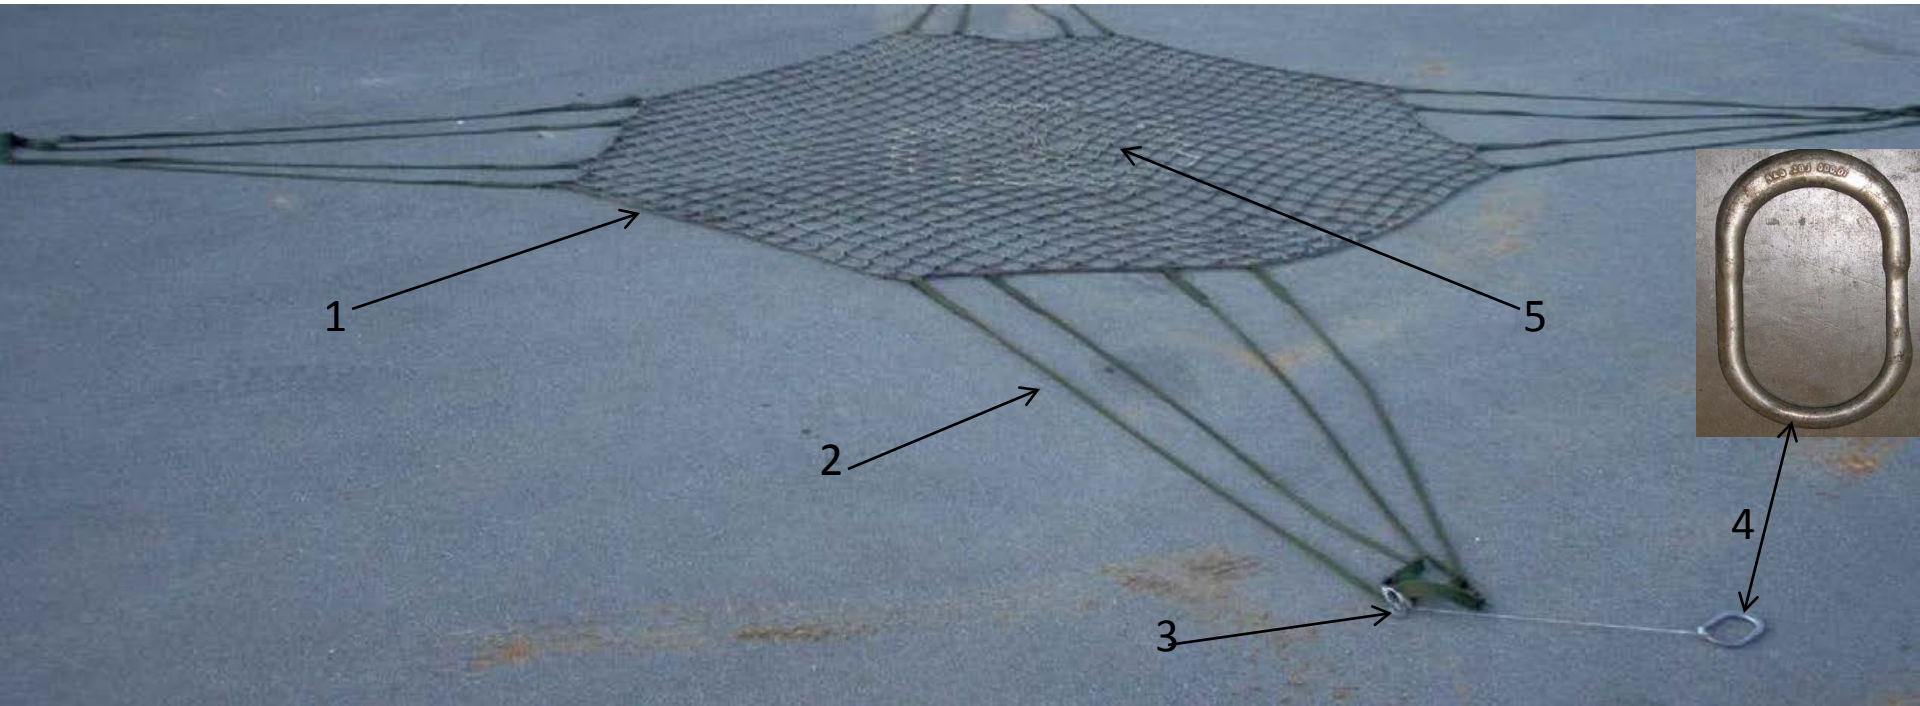

1. 5K CARGO NET/ RATED CAPACITY = 5,000 LBS, SIZE= 15FTX15FT
2. LIFTING LEG
3. HOOK
4. NET APEX FITTING/ RATED CAPACITY = 10,000 LBS
5. LOAD ZONE/ LOAD ZONE = 5FTX5FT, MESH SIZE = 6INX6IN





10K CARGO NET

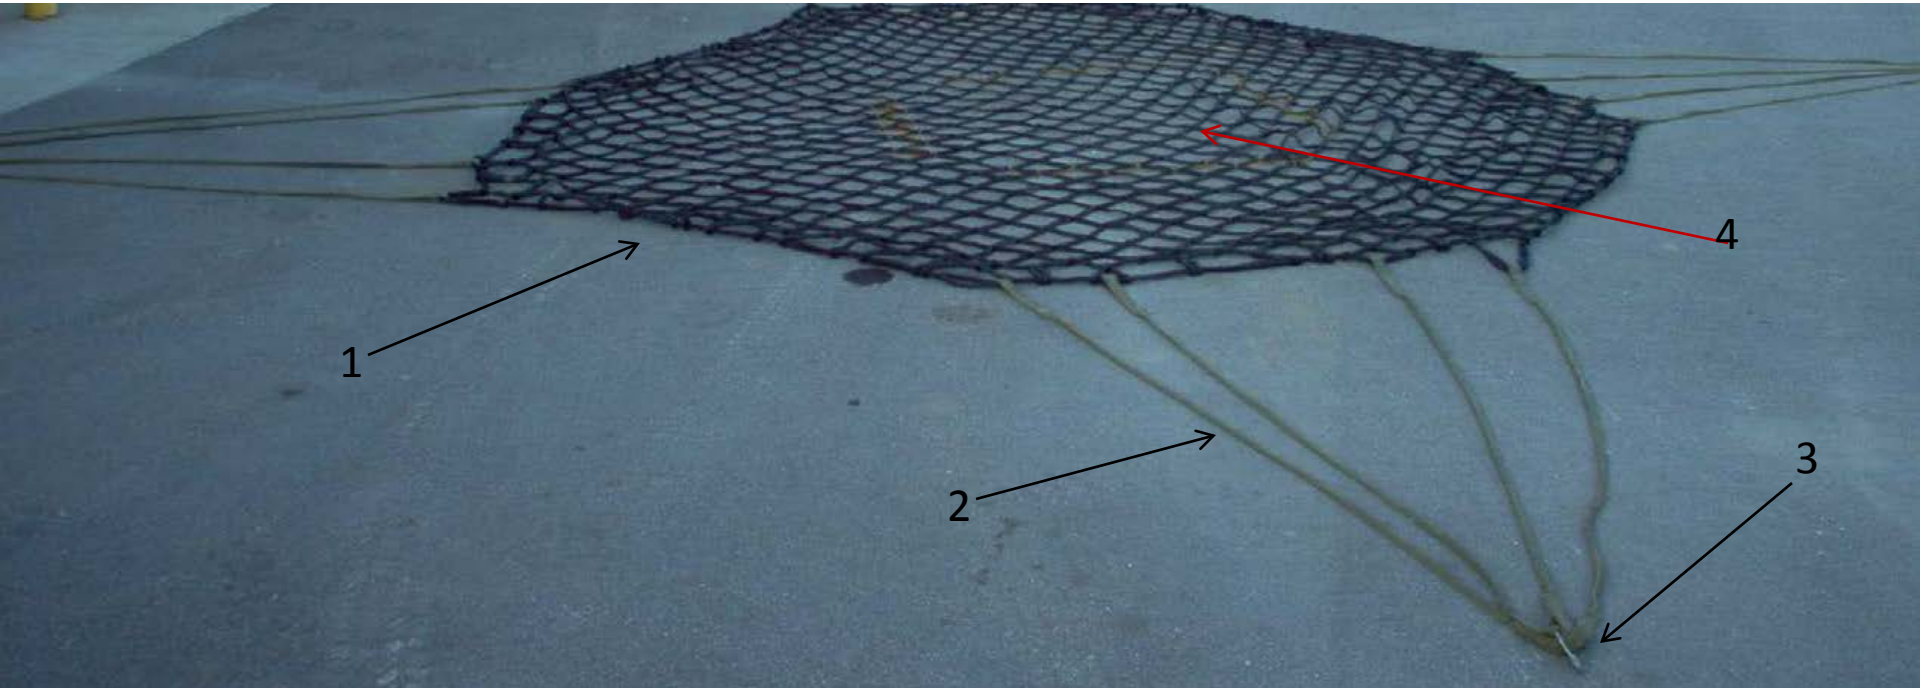

1. 10K CARGO NET/ RATED CAPACITY = 10,000 LBS, SIZE = 18FTX18FT
2. LIFTING LEG
3. HOOK
4. LOAD ZONE/ LOAD ZONE = 6FTX6FT, MESH SIZE = 7.5INX7.5IN




A22 CARGO BAG

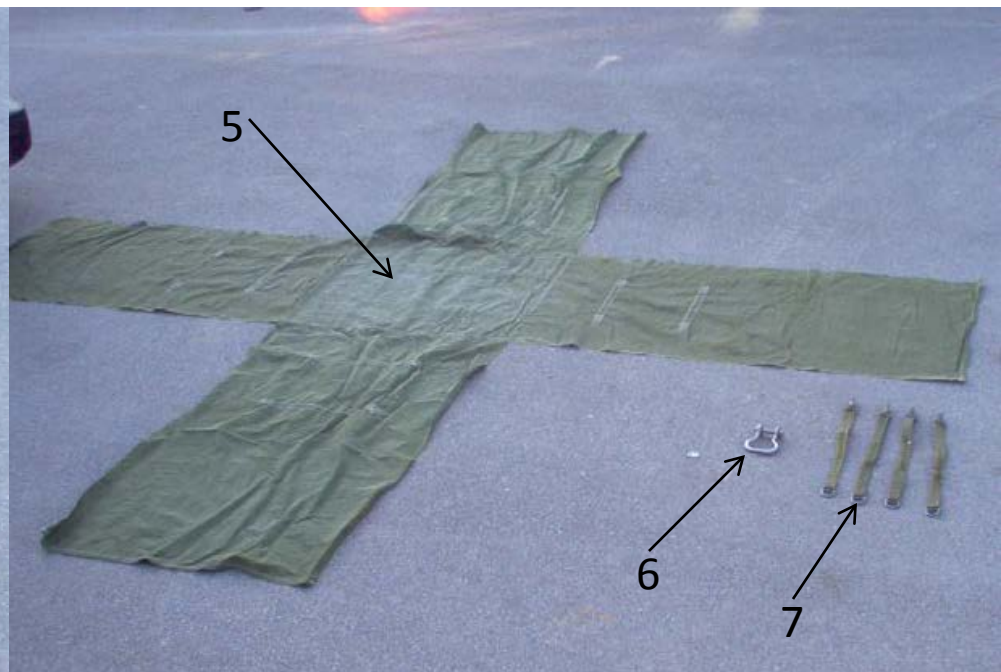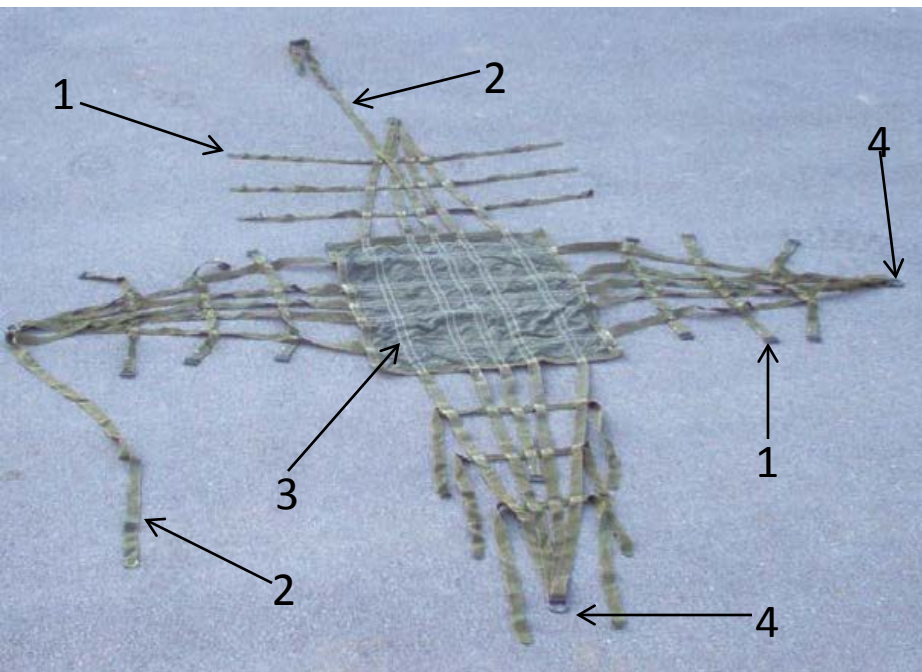

1. LATERAL STRAP
2. 188 INCH STRAP
3. SCUFF PAD
4. D RING
5. DUST COVER/ OPTIONAL
6. MEDIUM SUSPENSION CLEVIS/ RATED CAPACITY = 6,250 LBS
7. 24INCH SUSPENSION WEBS/ RATED CAPACITY = 550 LBS EACH




25,000 LBS CARGO HOOK REACH PENDANT

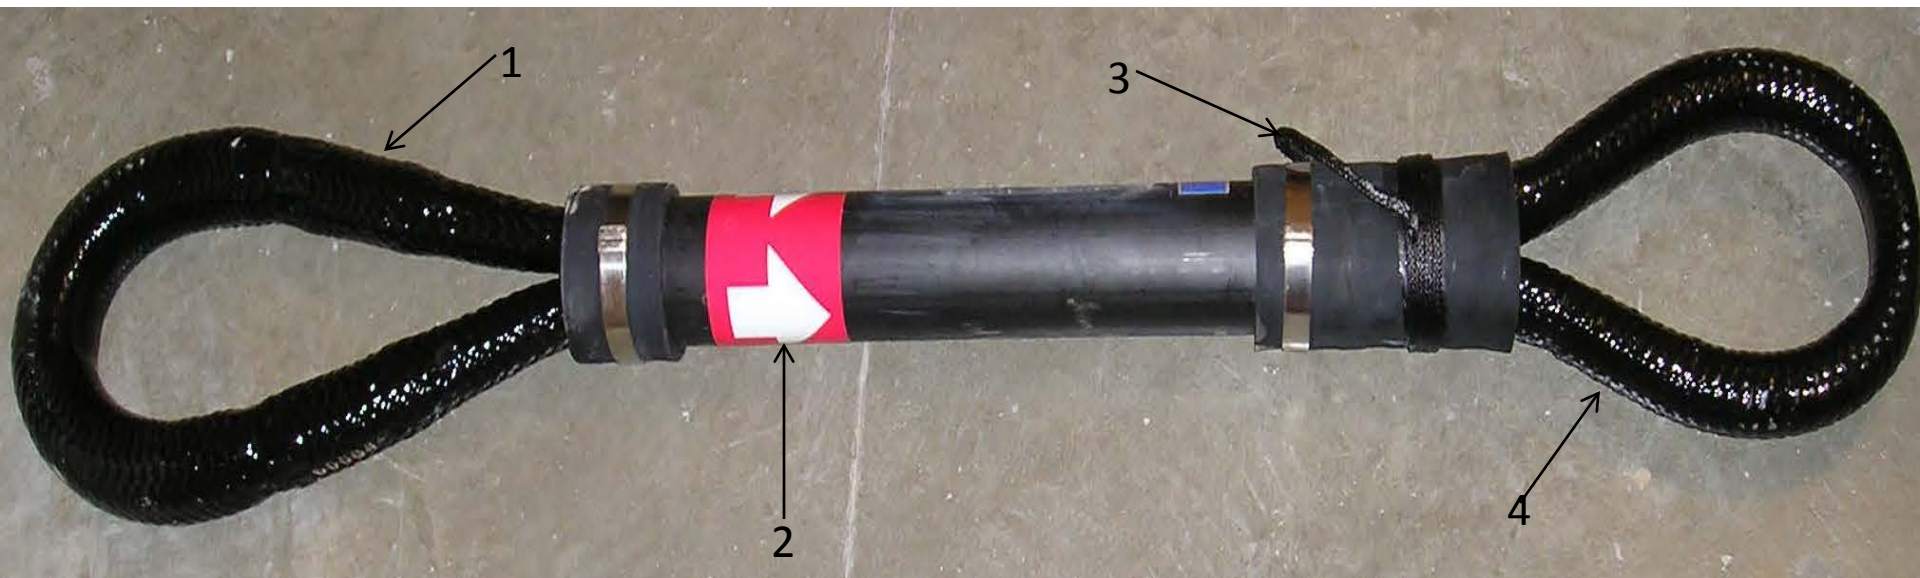

1. LARGE LOOPED END/ TOWARDS THE LOAD
2. DIRECTIONAL ARROW
3. HANDLE
4. SMALL LOOPED END/ TOWARDS AIRCRAFT




11,000LBS CARGO HOOK REACH PENDANT

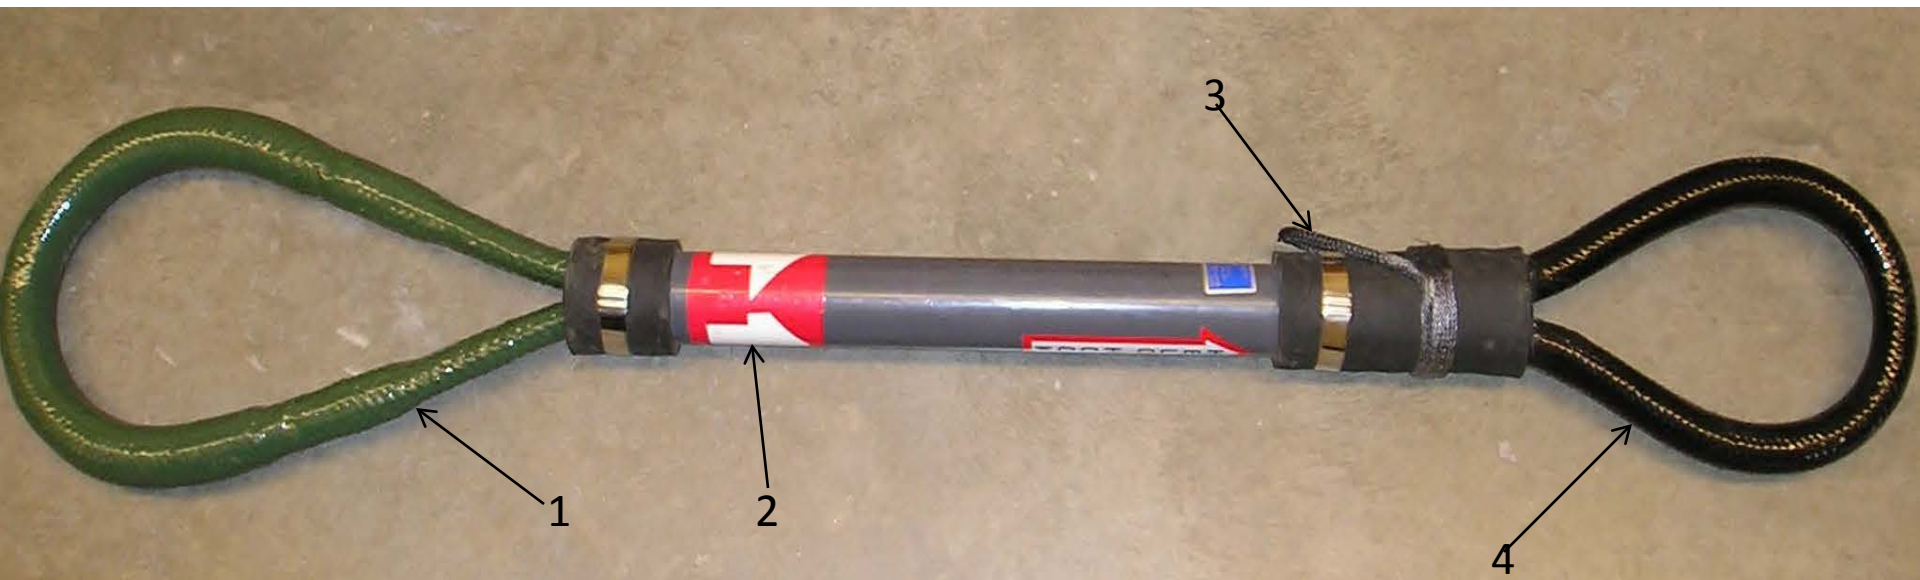

1. LARGE LOOPED END/ TOWARDS THE LOAD
2. DIRECTIONAL ARROW
3. HANDLE
4. SMALL LOOPED END/ TOWARDS AIRCRAFT



POLYESTER ROUND SLING

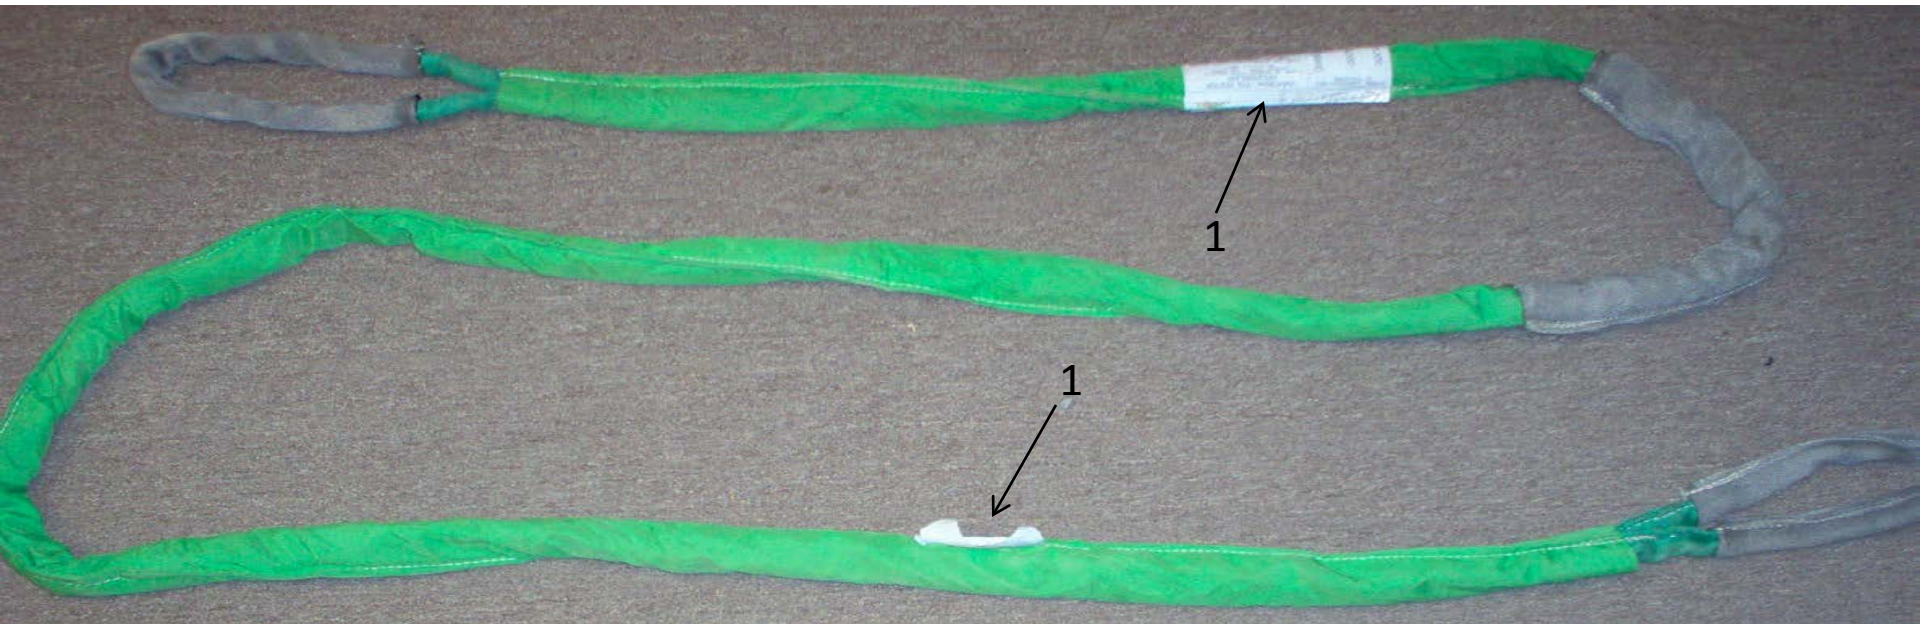

1. IDENTIFICATION TAG/ TWO MUST BE PRESENT

<u>LENGTH IN FEET</u>	<u>COLOR</u>	<u>LIFT CAPACITY BY HITCH TYPE</u>			<u>WEIGHT IN LBS.</u>
		<u>CHOKED</u>	<u>VERTICAL</u>	<u>BASKET</u>	
8	GREEN	4,200	5,300	10,600	4
17	GREEN	4,200	5,300	10,600	10
8	YELLOW	6,700	8,400	16,800	5
17	YELLOW	6,700	8,400	16,800	11
30	RED	10,600	13,200	26,400	26
65	BLUE	17,000	21,200	42,400	75
70	BLUE	17,000	21,200	42,400	81